

DS-2CE56C2T-IT1



Key Features

- 1.3 Megapixel high-performance CMOS
- Turbo HD output, up to 720P resolution
- True Day/Night
- DNR, Smart IR
- EXIR technology, up to 20m IR distance
- IP66 weatherproof

Specification


| Model | DS-2CE56C2T-IT1 |
|-------------------|---|
| Parameter | 720p EXIR Turbo HD Turret Camera |
| Camera | |
| Image Sensor | 1/3" Progressive Scan CMOS |
| Effective Pixels | 1280(H)*720(V) |
| Min. Illumination | 0.01 Lux @(F1.2,AGC ON), 0 Lux with IR |
| Shutter Time | 1/25(1/30) s to 1/50,000 s |
| Lens | 3.6mm (2.8mm, 6mm, 8mm optional) Angle of View: 76.88°(3.6mm), 99.73°(2.8mm), 50.1°(6mm), 36.8°(8mm) |
| Lens Mount | M12 |
| Angle Adjustment | Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360° |
| Day & Night | ICR |
| Synchronization | Internal synchronization |
| Video Frame Rate | 720p@25fps/720p@30fps |
| HD Video Output | 1 Turbo HD output |
| S/N Ratio | More than 52dB |
| General | |
| Working | -40 °C - 60 °C (-40 °F - 140 °F) |

| | |
|-----------------------|---------------------------------------|
| Temperature/Humidity | Humidity 90% or less (non-condensing) |
| Power Supply | 12V DC |
| Power Consumption | Max. 3W |
| Weather Proof Ratings | IP66 |
| IR Range | Up to 20m |
| Dimension | Φ114.6 × 89.1mm(Φ4.5" × 3.5") |
| Weight | Net weight: 286 g (0.63 lb) |
| | Shipping weight: 365 g (0.8 lb) |

Order Model

DS-2CE56C2T-IT1

Dimension

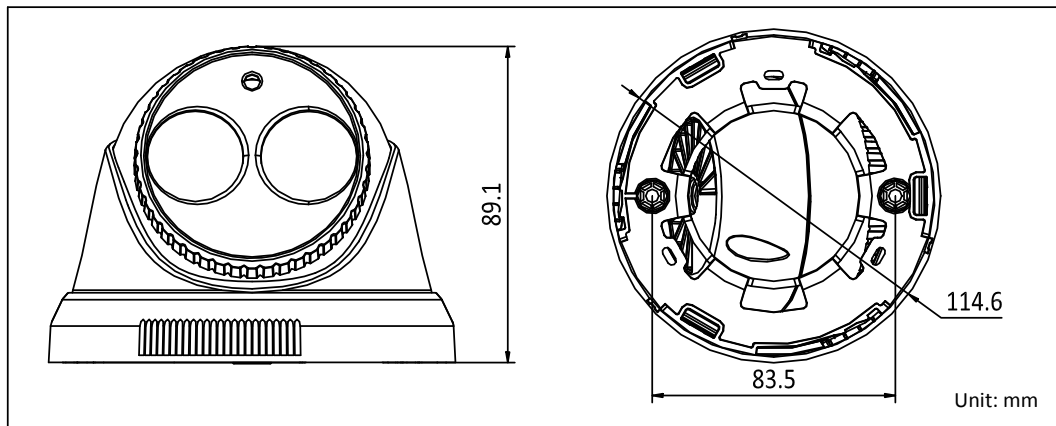

Accessories



Indoor/outdoor wall mount
DS-1272ZJ-110



Indoor wall mount
DS-1258ZJ